



5mm ultra-slim profile for the modern home or commercial space. A wide variety of standard, stainless steel skin or customised colours to choose from, providing design solutions for any decor. High-quality polycarbonate or stainless steel switch plates that provide our widest variety of functions and value-added features.

T&J



Top quality polycarbonate design with ultra-slim profile (5mm depth).



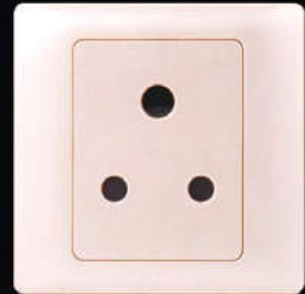
Replaceable colour plates renew your modern decoration anytime.



Centred accent frame to enhance your décor by adding a touch of colour or "glow in the dark" switch locators.



DK801PC-4TU-CS
1 Gang RJ45 Cat.5e Data Socket
+ RJ11 Telephone Socket (4 Pin)



DK815-PS
15A 1 Gang Unswitched Socket



DK801ETV-PS
1 Gang Sat. TV Socket



DK828-PS
115/230V Shaver Socket
with overcurrent protection



DK271-PPT
16A 1 Gang 1 Way Switch



DK8553-PW
1 Gang Triplex Socket (Sat + TV + FM)

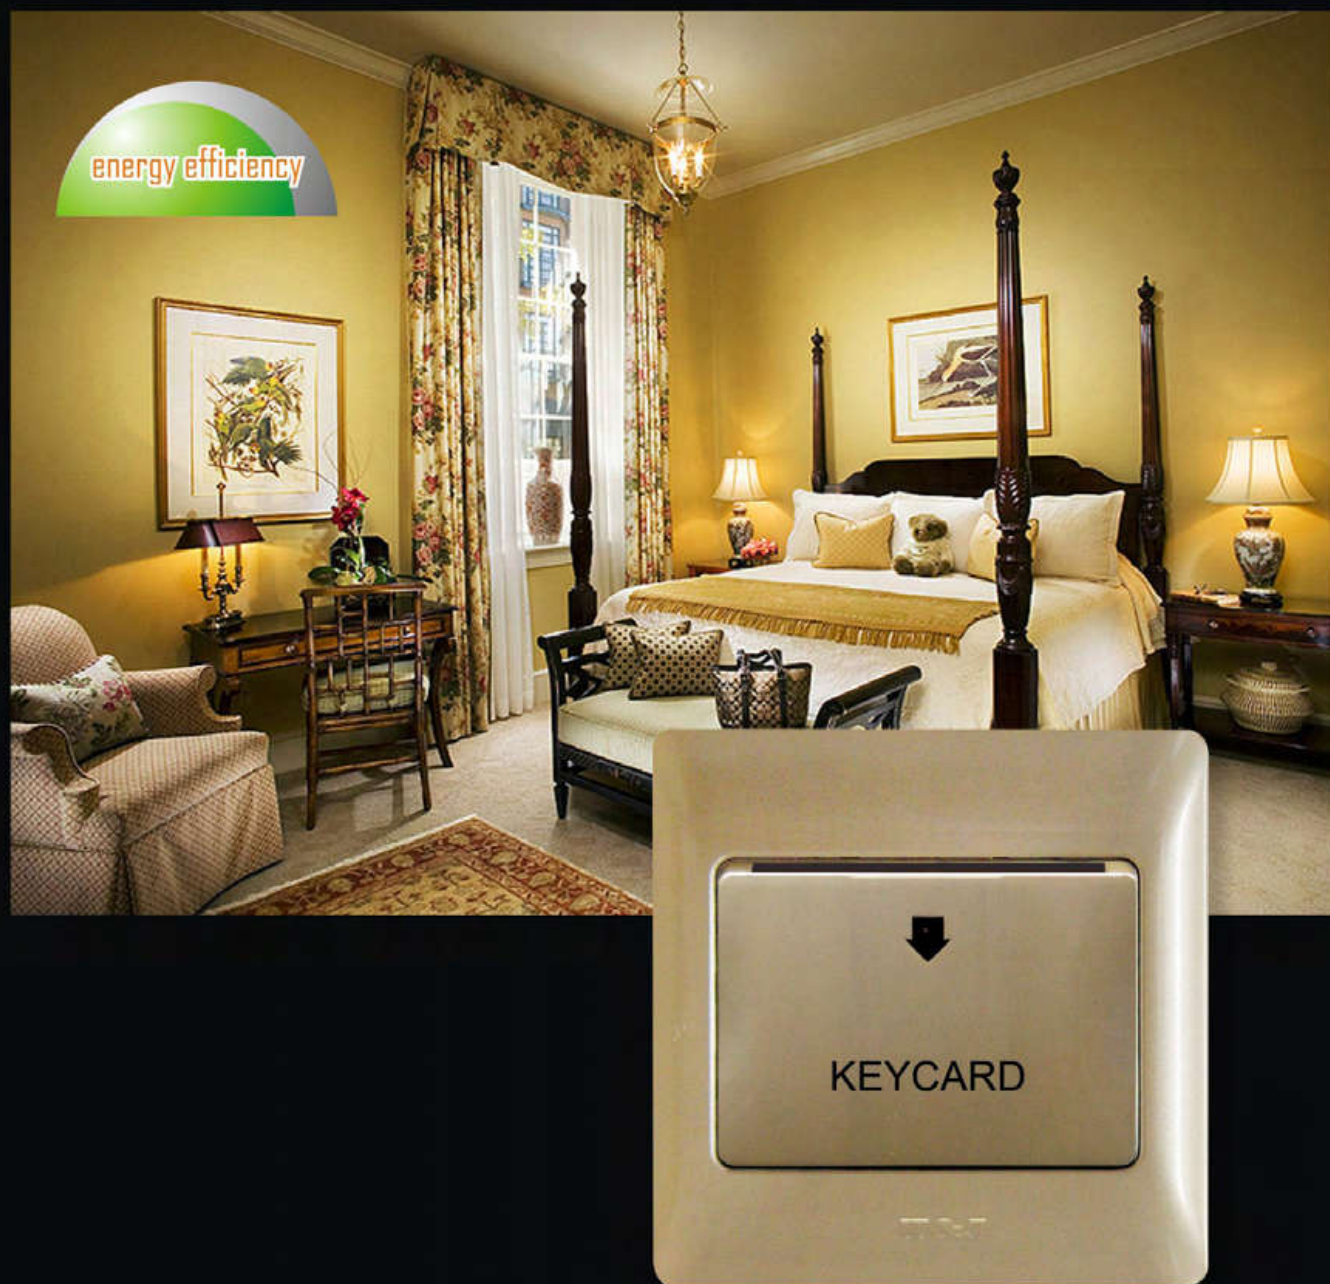


DK813SD-CS
13A 2 Gang Switched Socket



DK801-4TU-SS
1 Gang RJ11 Telephone Socket (4 Pin)





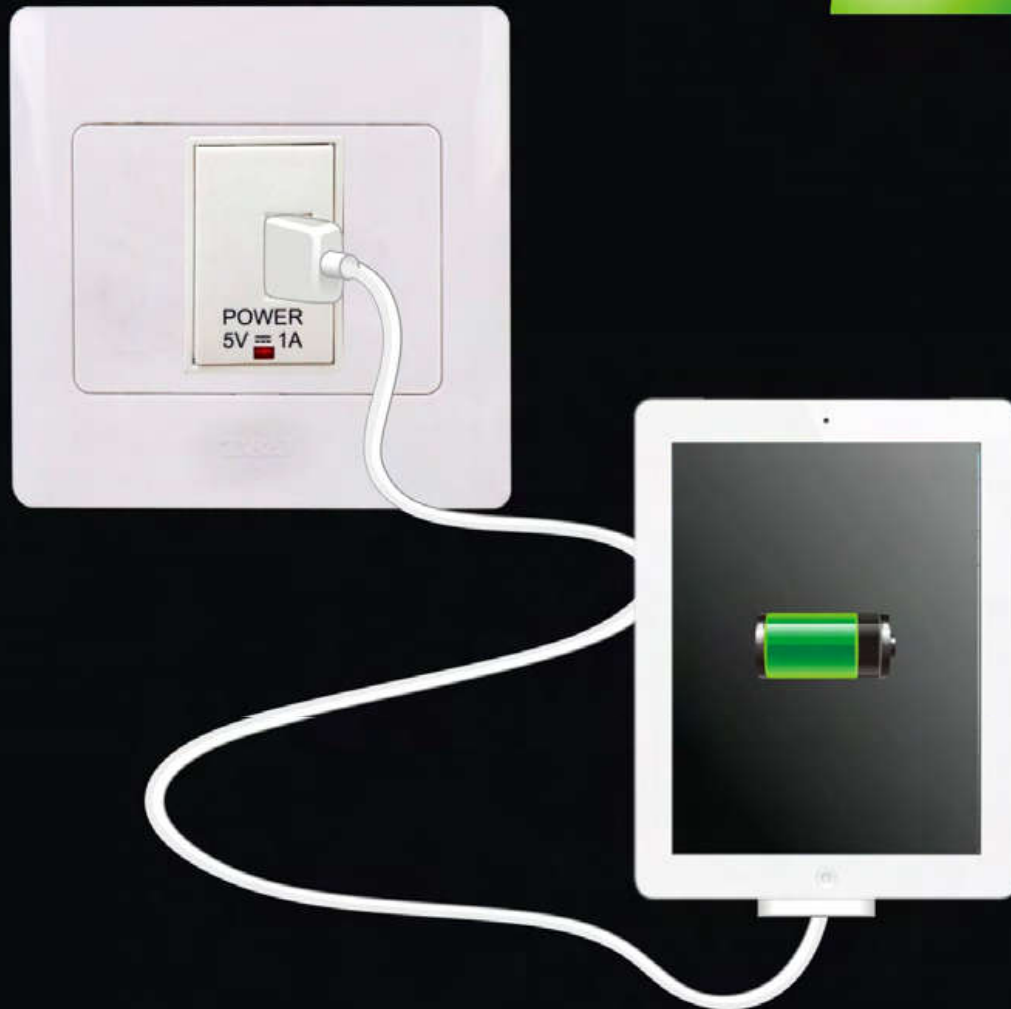
DK2-3IC 30A IC Keycard Switch

Ideal for hotels, motels, guest houses, senior residences or other similar facilities. Put an end to lights, appliances or air conditioners left on in empty rooms, this will translate into real savings on your electric energy bills. Works with all standard door locks with keycard coding devices.



K7813RCD 13A Portable RCD Protection Adaptor

To protect yourself in any situation where you use an appliance near water or in a damp area, use a portable RCD adaptor, which simply plugs into a wall socket before you plug in the appliance or extension cord. The RCD adaptor has a TEST and a RESET button to ensure safe operation. If your appliance stops functioning properly for any reason, it will automatically cut off the power, protecting you from electrical shock.



K801USB-WH

1 Gang USB Power Charger

USB ports are finally breaking free of computers, finding homes on wall sockets, floor boxes and desk sockets. This is much more efficient method to charge USB devices than using a conventional AC adapter, and you can save electricity. This product is also available for use with all other T&J modular plates.



DK2-ET 630W 230V Touch Dimmer

A gentle tap to the face of the dimmer turns the lights on or off. By keeping a finger on the dimmer, the brightness of the lights can be raised or lowered as required. To change this setting, all the user has to do is touch and hold the face of the dimmer until the desired brightness is achieved.



DK2700A 1W Night Light

Completely new options for lighting design in any building. Equipped with innovative LED technology, the night light can be mounted in a normal flush wall box. Lamps can provide fascinating accents to a room's lighting, creating a harmonious atmosphere or showing the right way by acting as an orientation light. Can be used as night light, floor lamp, stair indicator or wall scone.



DK2C-DMB 10A Bell Switch with “Do Not Disturb” + “Make Up Room” indicators

This switch is installed outside the room. It is used to display “Do Not Disturb” or “Make Up Room” indicators. By pressing the switch inside the room, the relevant indicator will light up. There is also a door bell option.



DK2772L-2 16A 2 Gang 2 Way Interlocking Switch with neon

The switch is installed inside the room. It is used to activate either the “Do Not Disturb” or “Make Up Room” indicators outside the room. Both indicators act independently, so only one indicator can light up at a time.

T&J

e-Tech System

Fast and hassle-free installation

No re-wiring needed

Easy to swap with existing wall switches



Radiance design collection

Product Features:

Retrofit existing switches
Wireless control
Last setting memory function
Easy installation and operation

A variety of remote controls to select from
Scene control can be set by user on the remote controller
Switch Availability: 1 gang, 2 gang and 3 gang
Dimmer(rising edge) Availability: 1 gang and 2 gang

Technical Specifications

- Rated voltage: AC180-250V
- Receiving Sensitivity: -105dBm
- Receiving Frequency: 315MHZ+/-200HZ
- RF output power on K3-RF2: <4mW
- Rated power for incandescent lamp

Product List

Model NO.	Product Code	Description	Package
K3-RFS1	1 Gang RF Remote Switch		1/50
K3-RFS2	2 Gang RF Remote Switch		1/50
K3-RFS3	3 Gang RF Remote Switch		1/50
K3-RFM1	1 Gang RF Dimmer(rising edge)		1/50
K3-RFM2	2 Gang RF Dimmer(rising edge)		1/50
K3-RF2	12-circuit Remote Controller		1/50
K3-RFW	Wall-mount Scene Controller		1/50

Model NO.	Maximum power per output	Maximum power per module	Minimum power to operate
K3-RFM1	500W	500W	35W
K3-RFM2	200W	500W	35W
K3-RFS1	1000W	1000W	1000W
K3-RFS2	1000W	2000W	1500W
K3-RFS3	1000W	2500W	1500W

- Rated power for fluorescent and energy saving lamps

Model NO.	Maximum power per output	Maximum power per module	Minimum power to operate
K3-RFS1	200W	200W	15W
K3-RFS2	200W	400W	15W
K3-RFS3	200W	600W	15W



radiance



ultra-slim profile




stainless steel skin plates





T&J

Switches

Product	Model No.	Description	Remarks
	DK271	16A 1 Gang 1 Way Switch	Nominal plate size: 88×88 mm
	DK271-2	16A 1 Gang 2 Way Switch	Minimum wall box depth: 25 mm
	DK271-DP	20A 1 Gang DP Switch	Pack (carton / box): 100 / 10
	DK277	10A 1 Gang Intermediate Switch	
	DK221	10A 1 Gang 2 Way Shutter Switch	
	DK271L	16A 1 Gang 1 Way Switch with neon	Nominal plate size: 88×88 mm
	DK271L-2	16A 1 Gang 2 Way Switch with neon	Minimum wall box depth :25 mm
	DK271L-DP	20A 1 Gang DP Switch with neon	Pack (carton / box): 100 / 10
	DK271LED*	16A 1 Gang 1 Way Switch with LED indicator	Only for use with incandescent lamps.*
	DK2720L-2DP	20A 1 Gang 2 Way DP Switch with neon	
	DK272	16A 2 Gang 1 Way Switch	Nominal plate size: 88×88 mm
	DK272-2	16A 2 Gang 2 Way Switch	Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK272L	16A 2 Gang 1 Way Switch with neon	Nominal plate size: 88×88 mm
	DK272L-2	16A 2 Gang 2 Way Switch with neon	Minimum wall box depth: 25 mm
	DK272L-DP	20A 2 Gang DP Switch with neon	Pack (carton / box): 100 / 10
	DK272LED*	16A 2 Gang 1 Way Switch with LED indicator	Only for use with incandescent lamps.*
	DK2772L-2	16A 2 Gang 2 Way Interlocking Switch with neon	
	DK273	16A 3 Gang 1 Way Switch	Nominal plate size: 88×88 mm
	DK273-2	16A 3 Gang 2 Way Switch	Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK273L	16A 3 Gang 1 Way Switch with neon	Nominal plate size: 88×88 mm
	DK273L-2	16A 3 Gang 2 Way Switch with neon	Minimum wall box depth: 25 mm
	DK273LED*	16A 3 Gang 1 Way Switch with LED indicator	Pack (carton / box): 100 / 10 Only for use with incandescent lamps.*
	DK274	16A 4 Gang 1 Way Switch	Nominal plate size :88×88 mm
	DK274-2	16A 4 Gang 2 Way Switch	Minimum wall box depth :25 mm Pack (carton / box): 100 / 10 For use with K1191
	DK274L	16A 4 Gang 1 Way Switch with neon	Nominal plate size :88×88 mm
	DK274L-2	16A 4 Gang 2 Way Switch with neon	Minimum wall box depth :25 mm
	DK274LED	16A 4 Gang 1 Way Switch with LED indicator	Pack (carton / box): 100 / 10 For use with K1191
	DK275	16A 5 Gang 1 Way Switch	Nominal plate size: 148×88 mm
	DK275-2	16A 5 Gang 2 Way Switch	Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK275L	16A 5 Gang 1 Way Switch with neon	Nominal plate size: 148×88 mm
	DK275L-2	16A 5 Gang 2 Way Switch with neon	Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5


Switches

Product	Model No.	Description	Remarks
	DK220 DK232 DK245	20A 1 Gang DP Switch 32A 1 Gang DP Switch 45A 1 Gang DP Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 25 / 35* mm Pack(carton/box): 100 / 10
	DK220L DK232L DK245L	20A 1 Gang DP Switch with neon 32A 1 Gang DP Switch with neon 45A 1 Gang DP Switch with neon	Nominal plate size: 88×88 mm Minimum wall box depth: 25 / 35* mm Pack (carton / box): 100 / 10
	DK245D	45A 1 Gang DP Switch (146 type)	Nominal plate size: 148×88 mm Minimum wall box depth: 35* mm Pack (carton / box): 50 / 5
	DK245DL	45A 1 Gang DP Switch with neon (146 type)	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5

Retractive Switches

Product	Model No.	Description	Remarks
	DK271-B	16A 1 Gang Bell Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK261 DK261-2 DK2222	16A 1 Gang 1 Way Retractive Switch 16A 1 Gang 2 Way Retractive Switch 6A 1 Gang Retractive Shutter Switch	Nominal plate size :88×88 mm Minimum wall box depth :25 mm Pack(carton/box):100 / 10
	DK261L DK261LED*	16A 1 Gang 1 Way Retractive Switch with neon 16A 1 Gang 1 Way Retractive Switch with LED indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10 Only for use with incandescent lamps.
	DK262 DK262-2	16A 2 Gang 1 Way Retractive Switch 16A 2 Gang 2 Way Retractive Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK262L DK262LED* DK262L-2 DK262LED-2*	16A 2 Gang 1 Way Retractive Switch with neon 16A 2 Gang 1 Way Retractive Switch with LED indicator 16A 2 Gang 2 Way Retractive Switch with neon 16A 2 Gang 2 Way Retractive Switch with LED indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack(carton/box): 100 / 10 Only for use with incandescent lamps.


Retractive Switches

Product	Model No.	Description	Remarks
	DK263 DK263-2	16A 3 Gang 1 Way Retractive Switch 16A 3 Gang 2 Way Retractive Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK263L DK263LED*	16A 3 Gang 1 Way Retractive Switch with neon 16A 3 Gang 1 Way Retractive Switch with LED indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10 Only for use with incandescent lamps.
	DK264 DK264-2	16A 4 Gang 1 Way Retractive Switch 16A 4 Gang 2 Way Retractive Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK264L	16A 4 Gang 1 Way Retractive Switch with neon	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK265 DK265-2	16A 5 Gang 1 Way Retractive Switch 16A 5 Gang 2 Way Retractive Switch	Nominal plate size: 148×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5

Dimmers

Product	Model No.	Description	Remarks
	DK2521-250 DK2521-400 DK2521-2-250 DK2521-2-400	250W 230V 1 Gang 1 Way Dimmer (rotate on / off) 400W 230V 1 Gang 1 Way Dimmer (rotate on / off) 250W 230V 1 Gang 2 Way Dimmer (push on / off) 400W 230V 1 Gang 2 Way Dimmer (push on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK211-M2 DK211-1KM2 DK311-M2 DK321-M2	630W 230V 1 Gang Dimmer (rotate on / off) 1000W 230V 1 Gang Dimmer (rotate on / off) 25-500W 127V 1 Gang Dimmer (rotate on / off) 25-800W 127V 1 Gang Dimmer (rotate on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK2522-250 DK2522-400	250W 230V 2 Gang 1 Way Dimmer (rotate on / off) 400W 230V 2 Gang 1 Way Dimmer (rotate on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK2-ET	630W 230V 1 Gang Touch Dimmer with LED indicator + off position	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.

Dimmers

Product	Model No.	Description	Remarks
	DK2-ET-2	630W 230V 1 Gang Touch Dimmer with LED indicator, off position + multi-way control	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK2-ED	630W 230V 1 Gang Dimmer with off position	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK273D-M2	630W 230V 2 Gang Dimmer (rotate on / off) + 10A 3 Gang 1 Way Switch	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK3-M2	1~10V 1 Gang DC Output Dimmer (only for dimmable electronic ballast)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2522-2-250 DK2522-2-400	250W 230V 2 Gang 2 Way Dimmer (push on / off) 400W 230V 2 Gang 2 Way Dimmer (push on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.

All dimmers should only be used with incandescent lamp, unless otherwise specified.

Fan Controls

Product	Model No.	Description	Remarks
	DK2521-LV250 DK2521-LV400	250VA 230V 1 Gang Fan Control (rotate on / off) 400VA 230V 1 Gang Fan Control (rotate on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK2C-MM4	3A 230V 1 Gang Mechanical Fan Control	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with incandescent lamps.
	DK3C-M4	2A 230V 1 Gang Electronic Fan Control with speed indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with fans.
	DK2C-MMD	100VA 1 Gang Fan Control (rotate on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5 Only for use with fans.

Fan Controls



Product	Model No.	Description	Remarks
	DK2522-LV250	250VA 230V 2 Gang Fan Control (rotate on / off)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5 Only for use with fans.
	DK2522-LV400	400VA 230V 2 Gang Fan Control (rotate on / off)	

All fan controls should only be used with fan.

BS Sockets

Product	Model No.	Description	Remarks
	DK805	5A 1 Gang Unswitched Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK815	15A 1 Gang Unswitched Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK815SA	15A 1 Gang Switched Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 100 / 10
	DK815SLA	15A 1 Gang Switched Socket with neon	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 100 / 10
	DK813	13A 1 Gang Unswitched Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK813SB	13A 1 Gang Switched Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK813SLA	13A 1 Gang Switched Socket with neon	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 100 / 10
	DK813D	13A 2 Gang Unswitched Socket	Nominal plate size: 148×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5

BS Sockets

Product	Model No.	Description	Remarks
	DK813SDB DK813SD-DP	13A 2 Gang Switched Socket 13A 2 Gang DP Switched Socket	Nominal plate size: 148×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK813SDLA	13A 2 Gang Switched Socket with neon	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2548L	45A Cooker Control Unit + 13A Switched Socket with neon	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5


Schuko Sockets

Product	Model No.	Description	Remarks
	DK827	16A 1 Gang 2 Pin + Earth German Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK8116V	16A 1 Gang 2 Pin + Earth French Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 100 / 50

Universal Sockets

Product	Model No.	Description	Remarks
	DK810UV1	15A 1 Gang 2 Pin + Earth Euro American Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton/box): 50 / 5
	DK816UV2L	16A 1 Gang 2 Pin + Earth Universal Socket with LED voltage indicator (110V / 220V)	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton/box): 50 / 5
	DK818	10A 1 Gang 2 Pin + Earth Universal Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5

Universal Sockets

Product	Model No.	Description	Remarks
	DK818S	13A 1 Gang 2 Pin + Earth Switched Universal Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK818SD	13A 2 Gang 2 Pin + Earth Switched Universal Socket	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5

Audio and Video Products

Product	Model No.	Description	Remarks
	DK801-MIC	1 Gang Microphone Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK801TV-MIC	1 Gang TV Socket with surge protection + Microphone Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 50
	DK802-MIC	2 Gang Microphone Socket (6.3 mm jack)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK804-MIC	4 Gang Microphone Socket (6.3 mm jack)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK2-V	1 Gang Volume Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2-VD	1 Gang Volume Switch	Nominal plate size: 148×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK3-V	6W 1 Gang Volume Switch with emergency alarm	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 100 / 50

Audio and Video Products

Product	Model No.	Description	Remarks
	DK2-SW	1 Gang 1 Way Switch + Volume Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK3-SV	1 Gang Channel Selection Switch + 6W Volume Switch with emergency alarm	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2-SV	1 Gang Channel Selection Switch + 6W Volume Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK801-SB	1 Gang Speaker Socket (banana jack)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK802-SB	2 Gang Speaker Socket (banana jack)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK801-VO	1 Gang Video RCA Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK802-AO	1 Gang Stereo Audio RCA Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK803AVO	1 Gang Video Socket + 1 Gang Stereo Audio RCA Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10

Telecommunication Products

Product	Model No.	Description	Remarks
	DK801USB	1 Gang USB Power Charger	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10

Telecommunication Products

Product	Model No.	Description	Remarks
	DK802USB	2 Gang USB Power Charger	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK801-PC DK811-PC	1 Gang RJ45 Cat.5e Data Socket 1 Gang RJ45 Cat.6 Data Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK802-PC DK812-PC	2 Gang RJ45 Cat.5e Data Socket 2 Gang RJ45 Cat.6 Data Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 50
	DK801-4TU DK801-6TU	1 Gang RJ11 Telephone Socket (4 Pin) 1 Gang RJ12 Telephone Socket (6 Pin)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK802-4TU DK802-6TU	2 Gang RJ11 Telephone Socket (4 Pin) 2 Gang RJ12 Telephone Socket (6 Pin)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK801-TS DK801-TM	1 Gang BT Secondary Telephone Socket 1 Gang BT Master Telephone Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK803-4TU DK803-6TU	2 Gang RJ11 Telephone Socket (4 Pin, 2 input 2 output) 2 Gang RJ12 Telephone Socket (6 Pin, 2 input 2 output)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5
	DK801PC-4TU DK801PC-6TU	1 Gang RJ45 Cat.5e Data Socket + RJ11 Telephone Socket (4 Pin) 1 Gang RJ45 Cat.5e Data Socket + RJ12 Telephone Socket (6 Pin)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 50 / 5

Television Sockets

Product	Model No.	Description	Remarks
	DK801TVO DK803TVO DK801TV	1 Gang TV Socket with 1 branch output + surge protection 1 Gang TV Socket with 3 branch output + surge protection 1 Gang TV Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10


Television Sockets

Product	Model No.	Description	Remarks
	DK802TV DK803TV	2 Gang TV Socket (1 input 2 output) 2 Gang TV Socket (2 input 2 output)	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK802TV-FM	1 Gang TV + FM Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK812ETV	1 Gang Sat. TV + TV Socket t	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK802ETV DK802ETV-FM	2 Gang Sat. TV Socket 1 Gang Sat. TV + FM Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK801ETV	1 Gang Sat. TV Socket	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10

Hotel Products

Product	Model No.	Description	Remarks
	DK2C-DM	"Do Not Disturb" + "Make Up Room" Indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK2C-MB	10A Bell Switch with "Make Up Room" indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK2C-DMB-DC	10A Bell Switch with "Do Not Disturb" + "Make Up Room" indicator	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10

Hotel Products

Product	Model No.	Description	Remarks
	DK2- 3IC	30A 230V IC Key Card Switch	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2- 2KTb	20A 230V Key Card Switch (optical switch with card recognition)	
	DK6- 2KT	20A 230V Key Card Switch with time delay	
	DK828	115/230V Shaver Socket with overcurrent protection	Nominal plate size: 148×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK2700A	1W 220V Night Light	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10
	DK2-AL	3A Alarm	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10

Remote Control Switches

Product	Model No.	Description	Remarks
	DK2-IED1^	40-600W 230V 1 Gang IR Dimmer	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack(carton/box): 50/1 For use with K2-RC. Only for use with incandescent lamps^. For use with K2-IRSM*
	DK2-IRS1^	600W 230V 1 Gang IR Switch	
	DK2-IRS1A*	200W 230V 1 Gang IR Switch (only for CFL)	
	DK2-IED2	40-600W 230V 2 Gang IR Dimmer	Nominal plate size :88×88 mm Minimum wall box depth :35 mm Pack(carton/box):50/1 For use with K2-RC. Only for use with incandescent lamps.
	DK2-IRS2	600W 230V 2 Gang IR Switch	
	DK2-IED3^	40-600W 230V 3 Gang IR Dimmer	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack(carton/box): 50/1 For use with K2-RC. Only for use with incandescent lamps^. For use with K2-IRSM*
	DK2-IRS3^	600W 230V 3 Gang IR Switch	
	DK2-IRS3A*	200W 230V 3 Gang IR Switch (only for CFL)	
	K2-RC	IR Remote Control	Nominal plate size: 95×50 mm Pack (carton / box): 100 / 10
	K2-IRSM	Power Supply Module for CFL	Pack (carton / box): 400 / 20 For use with: K2-IR1A / K2-IRS2A / K2-IRS3A

Electronic Switches

Product	Model No.	Description	Remarks
	DK2-TH DK2-TS DK2-LTS	1000W 230V Touch Switch with LED indicator 150W 230V Touch Time Delay Switch with LED indicator 100W 230V Touch Time Delay Switch with fire control outlet	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 5 Only for use with incandescent lamps and resistive loads.
	DK2-IR DK2-LIR	1000W 230V IR Motion Detector 1000W 230V IR Motion Detector with fire control outlet	Nominal plate size: 88×88 mm Minimum wall box depth: 35 mm Pack (carton / box): 50 / 5
	DK2-SC DK2-LSC	100W 230V Voice Activated Switch with time delay 500W 230V Voice Activated Switch with time delay + fire control outlet	Nominal plate size: 88×88 mm Minimum wall box depth: 25 mm Pack (carton / box): 100 / 10 Only for use with incandescent lamps and resistive loads.

Accessories

Product	Model No.	Description	Remarks
	K120	1 Gang IP54 weather proof Cover for Switch	Nominal plate size: 114.8×100 mm Pack (carton / box): 100 / 10
	K140	1 Gang IP54 weather proof Cover for Socket	Nominal plate size: 130.4×100 mm Pack (carton / box): 50 / 5
	K7813RCD	13A Portable RCD Protection Adaptor	



DK2-ED-PS
630W 230V 1 Gang Dimmer with off position



DK220-PS
20A 1 Gang DP Switch



DK272-SS
16A 2 Gang 1 Way Switch



DK801TV-CS
1 Gang Microphone Socket



DK263-CGO
16A 3 Gang 1 Way Retractive Switch



DK271-AMGIW
16A 1 Gang 1 Way Switch



DK8116V-WH
16A 1 Gang 2 Pin + Earth French Socket



DK801-PC-PS
1 Gang RJ45 Cat.5e Data Socket



DK271-B-PS
16A 1 Gang Bell Switch

Product Code Rules

Radiance

DK 27 1 L - 2 - PS (-ACR)

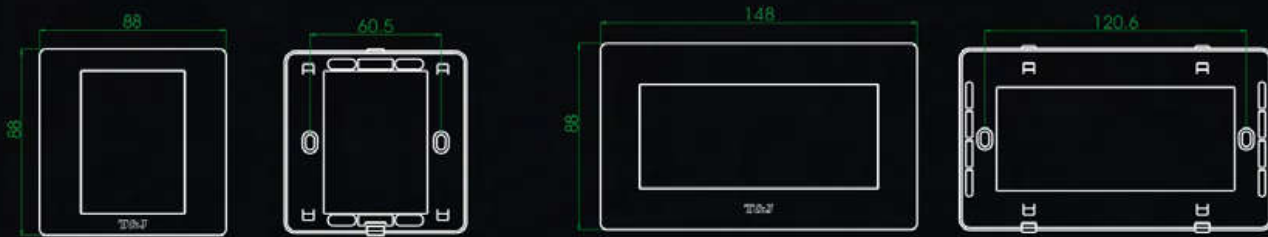
	Accent Frame	1
	Colour	2
	Way	3
	With neon or not	4
	Gang	5
	Switch type	6
	Collection design	7

Available Options

1	2	3	4	5	6	7
ALB Light Blue	CB Blue	2	L	1	27	CM B
ACB Blue	CR Red	2 Way	With Neon	1 Gang	Wide Switch	Colossal Alpine/Exclusif
ACR Red	CK Black	Blank	Blank	2	21	G E
ACO Orange	CS Silver	1 Way	Without Neon	2 Gang	Round Switch	Ultimate Unique
ACK Black	PS Champagne			3	252	GC M
ACG Green	ST Matt Black			3 Gang	Dimmer Switch	Titanium Metalclad
ACP Purple	GT Matt Grey			4	827	DK P
ACS Silver	CO Orange			4 Gang	Schuko Socket	Radiance Armor
APS Champagne	CP Purple			5	810	R
AWH White				5 Gang	GB Socket	Classy
AFL Luminous						

Dimensions

Scale = mm



Notes:

- *All illustrations and descriptions are only for guidance.
- *The colours and product photos you see in this brochure may vary from the actual products.
- *All T&J products/colours can be customised to satisfy the unique demand of the widest possible range of end-users.
- *T&J Electric reserves the right to change specifications and designs without notice.
- *Use dry soft cloth to clean the surface of the products. Cleaning agents may damage the finish.



K813SA-CS
13A 1 Gang Switched Socket



DK271-RPT
16A 1 Gang 1 Way Switch



DK818S-WH
13A 1 Gang 2 Pin + Earth Switched
Universal Socket



DK2-SC-CR
100W 230V Voice Activated Switch
with time delay



DK3C-M4-ACR
2A 230V 1 Gang Electronic Fan Control
with speed indicator