




## uPVC Cable Trunking

Code No	Width x Height	Standard Pack in Pieces
AT9901	32mm x 13mm	50
AT9906	23mm x 12mm	50
AT9906S (with sticker)	23mm x 12mm	50
AT9907	40mm x 20mm	20
AT9907DC (double compartment)	40mm x 20mm	20
AT9908*	16mm x 16mm	50
AT9909*	16mm x 25mm	25
AT9910*	16mm x 38mm	20
AT9911*	25mm x 25mm	20
AT9912*	25mm x 38mm	20
AT9913DC (double compartment)	60mm x 20mm	20
AT9921	55mm x 32mm	10
AT99215	50mm x 40mm	10
AT9922	55mm x 55mm	10
AT9932	75mm x 50mm	10
AT99325	75mm x 60mm	10
AT9933	75mm x 75mm	10
AT9942	100mm x 50mm	10
AT99425	100mm x 60mm	10
AT9943	100mm x 75mm	6
AT9944	100mm x 100mm	6
AT9963	150mm x 75mm	4
AT9964	150mm x 100mm	2
AT9984	200mm x 100mm	2

Standard Length: 2 meter, 2.9 meter, 6 feet and 8 feet.  
Other lengths are also available.



## uPVC Air-con Trunking

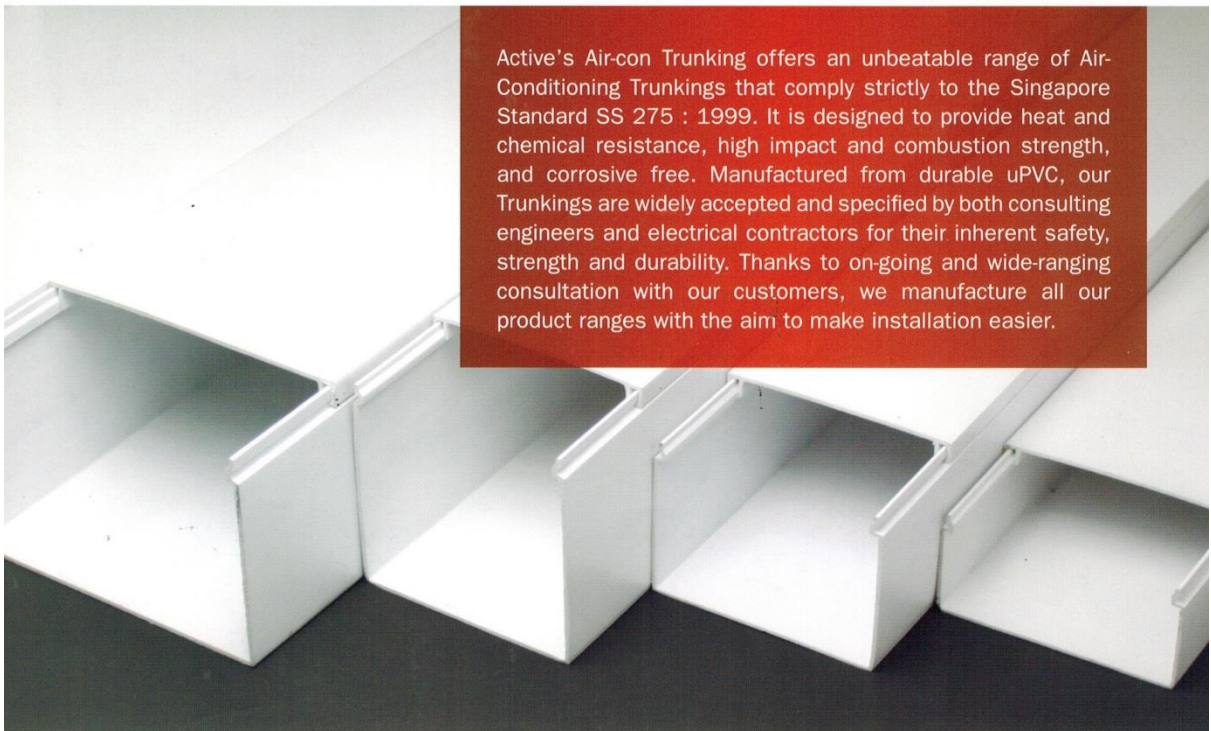

Active's Air-con Trunking offers an unbeatable range of Air-Conditioning Trunkings that comply strictly to the Singapore Standard SS 275 : 1999. It is designed to provide heat and chemical resistance, high impact and combustion strength, and corrosive free. Manufactured from durable uPVC, our Trunkings are widely accepted and specified by both consulting engineers and electrical contractors for their inherent safety, strength and durability. Thanks to on-going and wide-ranging consultation with our customers, we manufacture all our product ranges with the aim to make installation easier.